




ProOne Fuel Maximizer Water Removal Study

Lubetrak Sandy,UT


#2 DIESEL

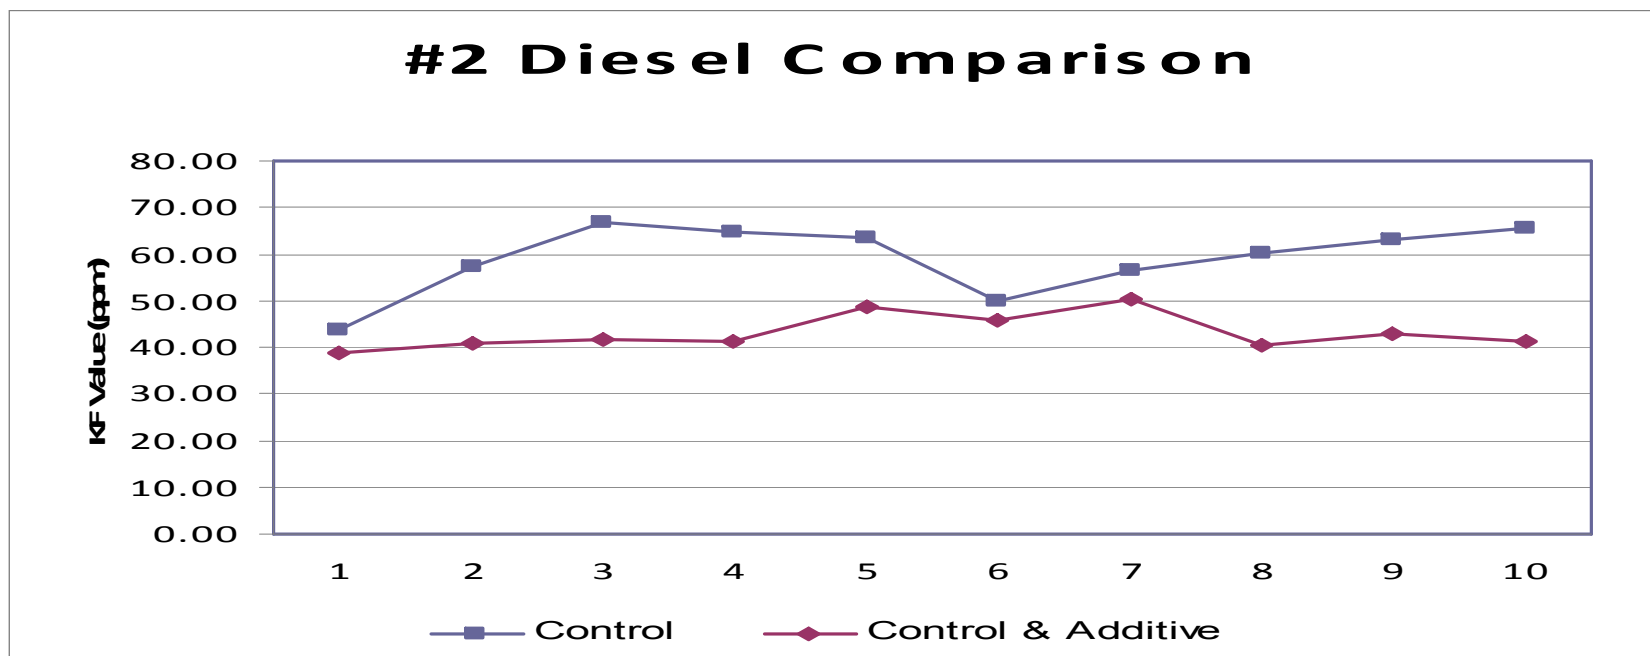

37.08% Reduction

5% BIODIESEL


B5 Biodiesel Blend Comparison

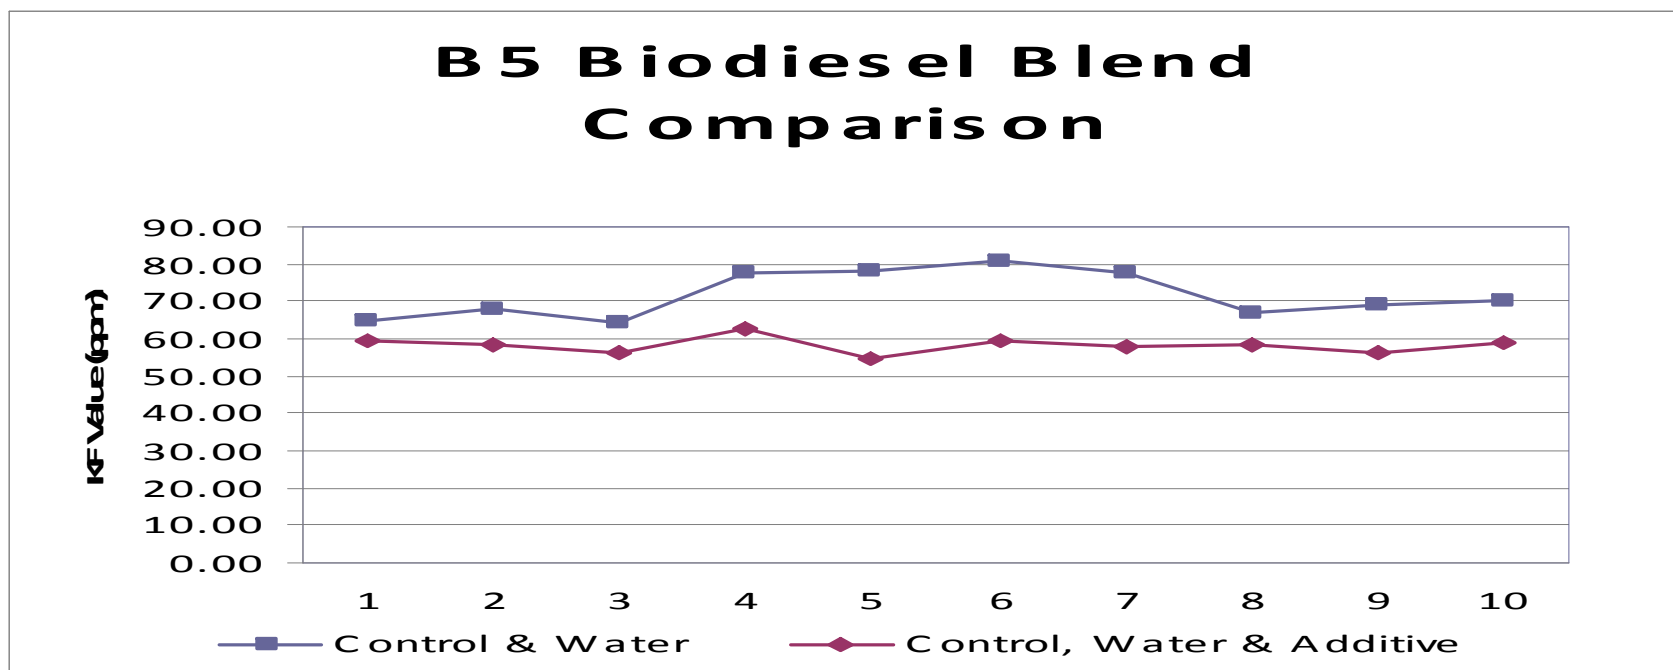

23.51% Reduction

20% BIODIESEL

B 20 Biodiesel Blend Comparison

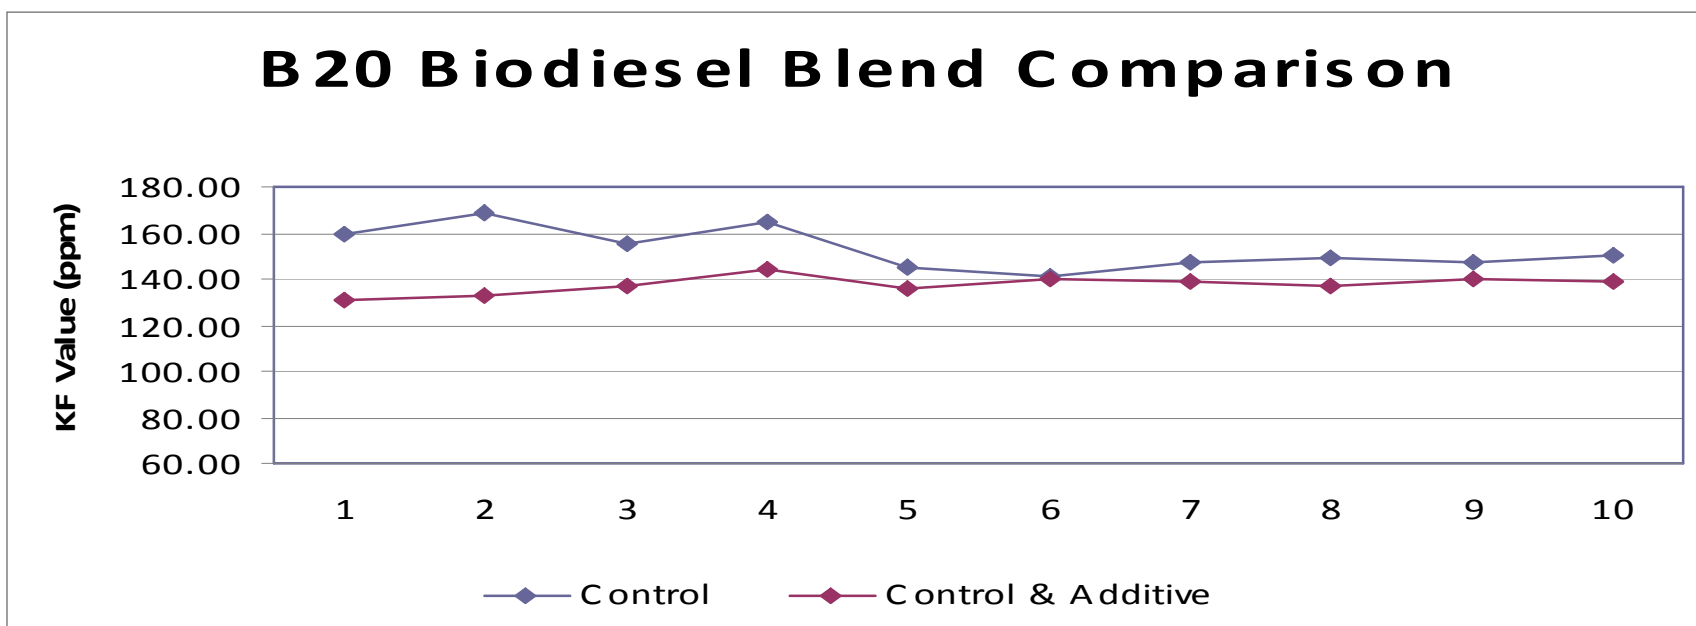


11.21% Reduction

Fuel Storage Tanks # 2 Diesel
95 ml



Fuel Treated with ProOne Fuel
Maximizer @ 1:3000 ratio
98 ml

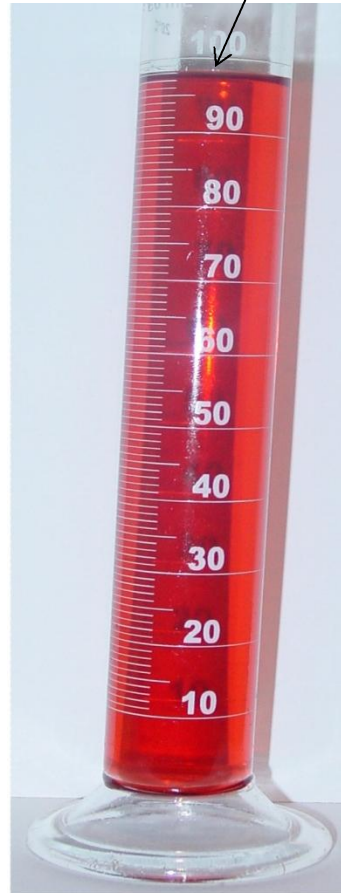

6 hours no agitation, 58% water
removed, 42% emulsified
94 ml

